


ACCESSORY

PRODUCT SHEET & SPECIFICATIONS

DOOR BELL INTERFACE (MODEL:G977)

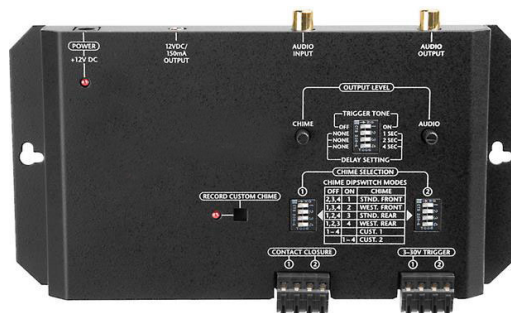

- DESCRIPTION

The G977 Doorbell Interface provides pleasant doorbell chimes. External contact closure and voltage triggers are combined with a programmable trigger tone/delay to integrate with control systems.

The G977 includes a choice of four pre-recorded and two custom recordable chimes to provide the appropriate doorbell chime. A UL-listed, universal voltage power supply is included for your convenience.

- FEATURES AND CAPABILITIES

- Four selectable preprogrammed chimes and two user recorded sound options
- Two doorbell inputs, triggered by voltage or contact closure via a screwless two piece connector
- Both doorbell inputs support standard or lighted doorbell buttons
- Separate level adjustments provided for chime
- One gold-plated mono audio sensing input
- One gold-plated mono audio output
- UL-listed in-line power supply with universal voltage capability

Model

G-977

DOOR BELL INTERFACE

– SPECIFICATIONS

+ Audio

Chime: 100 Hz ~ 3 kHz, +/- 3 dB

Audio Pass Through: 20 Hz ~ 20 kHz, +/- 0.5 dB

+ Trigger Inputs

Voltage Trigger Input: 3V-30V AC/DC

Contact Closure Inputs: < 10 ohms

+ Power Supply

Input: 100-240V AC 50-60 Hz 0.5 A

Output: 12V DC 1.25 A

+ Unit Dimensions

7-7/8" W x 4-1/8" H x 1" D

20 cm W x 10.5 cm H x 2.5 cm D